


大型PET树脂结晶·干燥机器

Large PET Resin Crystallization/drying Machine

以高度技术、依赖性及丰富实绩为基础的
纤维·薄膜·PET瓶胚制造工程用

Fiber/film/PET Flask Embryo Based on High Technology, Reliability and Rich Performance for Manufacture Engineering

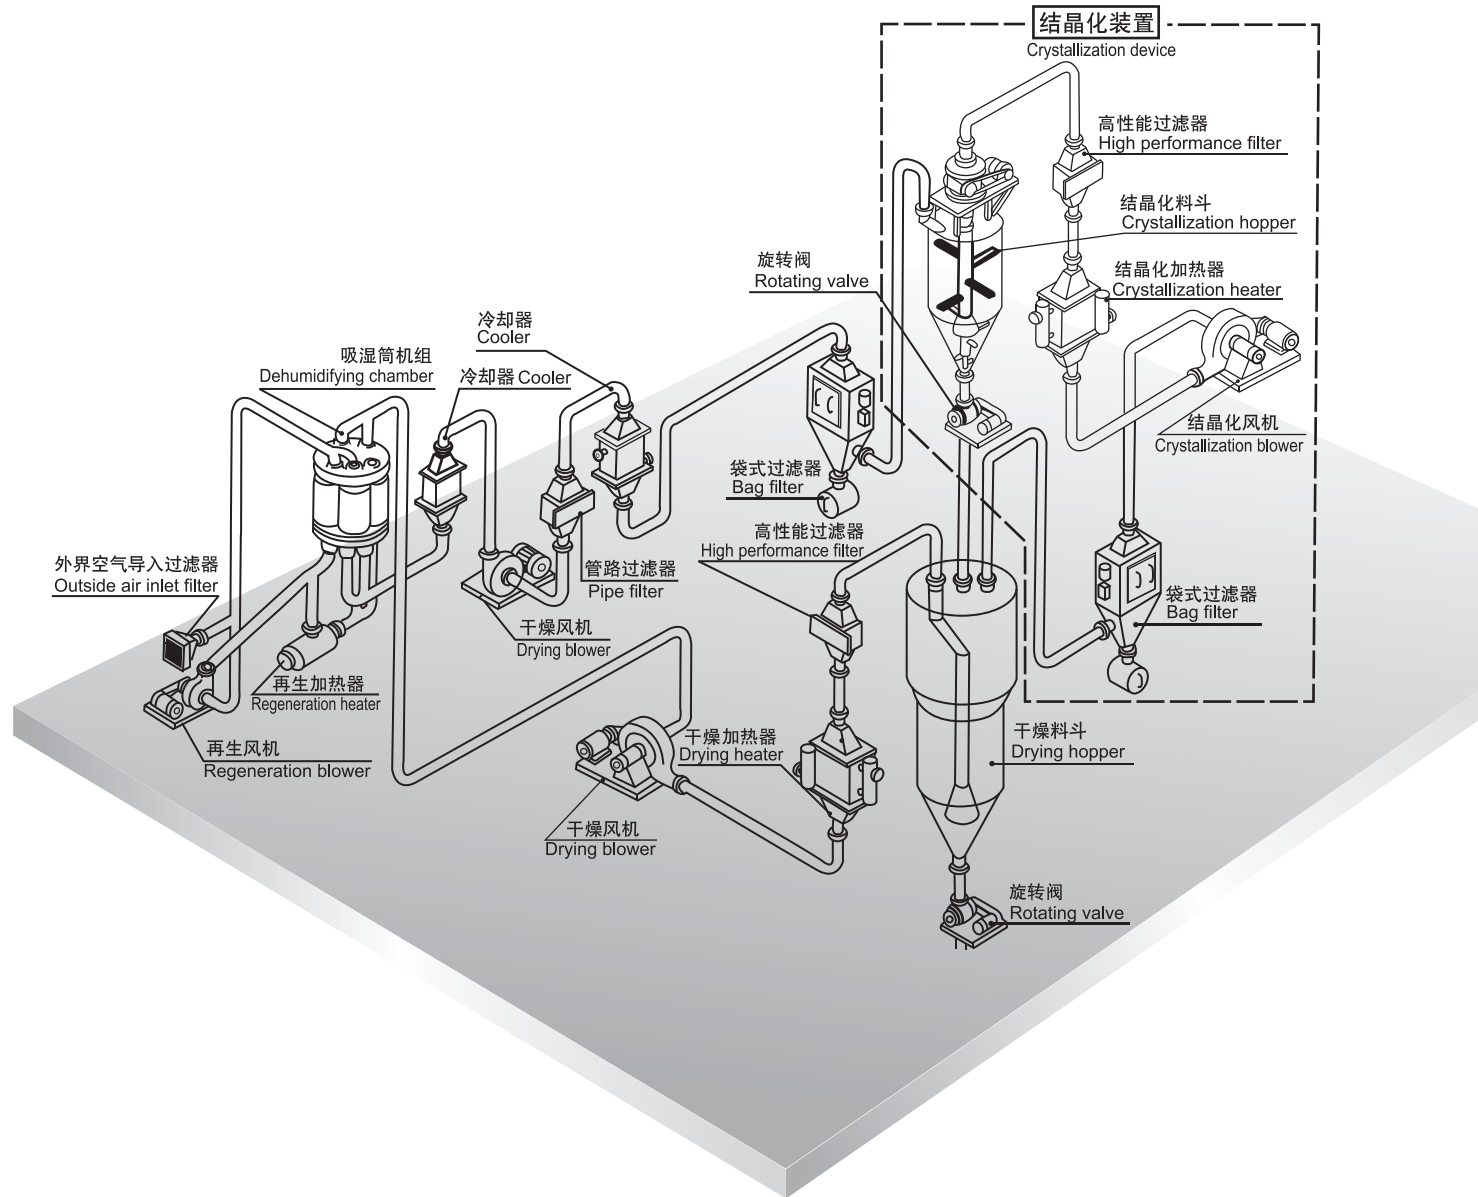

规格 Specifications

机器名称/Machine Name	代号/NO.	项目/Item	装置系列标准规格/Standard Specification of Device Series						
			10T/D	20T/D	30T/D	40T/D	50T/D	60T/D	
型号/Model			P-400C	P-800C	P-1200C	P-1600C	P-2000C	P-2400C	
结晶化装置 Crystallization Device	结晶化料斗/ Crystallization hopper	料斗容量/Hopper capacity (L)	850	1670	2500	3300	4200	5000	
		搅拌马达功率/ Power of stirring motor (kW)	7.5	15	30	30	45	45	
	加料用回转阀/ Rotating valve for feeding	RV	马达功率/Motor power (kW)	0.4	0.75	0.75	0.75	0.75	0.75
	出料用回转阀/ Rotating valve for discharge	RV	马达功率/Motor power (kW)	0.4	0.4	0.75	0.75	0.75	0.75
	结晶化风机/ Crystallization blower	BL	马达功率/Motor power (kW)	11	30	45	55	75	75
结晶化加热管/ Crystallization heater	SH	升温能力/Heating ability (°C)	80→160						
管路过滤器/Pipe filter	HF	过滤精度/Filtration precision	0.3μm×99.97%以上/Above						
布袋过滤器/Bag filter	BF	过滤面积/Filtration area (m ²)	12	20	30	40	50	60	
		马达功率/Motor power (kW)	0.4	0.4	0.4×2	0.4×2	0.4×2	0.4×2	
型号/Model			P-400D	P-800D	P-1200D	P-1600D	P-2000D	P-2400D	
干燥装置 Drying Device	干燥料斗/Drying hopper	DR	料斗容量/Hopper capacity (L)	4000	8000	12000	16000	20000	24000
	出料用回转阀/ Rotating valve for discharge	RV	马达功率/Motor power (kW)	0.4	0.4	0.75	0.75	0.75	0.75
	干燥用送风机/Drying blower	BL	马达功率/Motor power (kW)	7.5	15	22	30	37	45
	干燥用加热管/Drying heater	SH	升温能力/Heating ability (°C)	50→170					
	管路过滤器/Pipe filter	HF	过滤精度/Filtration precision	0.3μm×99.97%以上/Above					
布袋过滤器/Bag filter	BF	过滤面积/Filtration area (m ²)	12	20	30	40	50	60	
		马达功率/Motor power (kW)	0.4	0.4	0.4×2	0.4×2	0.4×2	0.4×2	
型号/Model			D-800S	D-800S×2	D-800S×3	D-2400×2	D-2400×3	D-2400×3	
脱湿干燥装置 Dehumidifying Drying Device	吸湿筒机组/ Dehumidifying chamber unit	AD	马达功率/Motor power (kW)	0.025	0.025×2	0.025×3	0.025×2	0.025×3	0.025×3
	冷却器/Cooler	CO	冷却能力/Cooling ability (°C)	120→40					
	管路过滤器/Pipe filter	LF	过滤精度/Filtration precision	15μm×80%以上/Above					
	干燥风机/Drying blower	BL	马达功率/Motor power (kW)	7.5	15	18.5	30	37	45
	冷却器/Cooler	CO	冷却能力/Cooling ability (°C)	60→40					
管路过滤器/Pipe filter	LF	过滤精度/Filtration precision	15μm×80%以上/Above						
外界空气导入过滤器/ Outside air inlet filter	LF	过滤精度/Filtration precision	15μm×80%以上/Above						
再生加热管/ Regeneration heater	EH	加热管功率/Heater power (kW)	18	36	54	27×2	27×3	27×3	
再生风机/Regeneration blower	BL	马达功率/Motor power (kW)	1.5	2.5	3.7	3.7	5.5	5.5	